


Operation and Installation Manual

For EntriTech series hands free indoor audio handsets

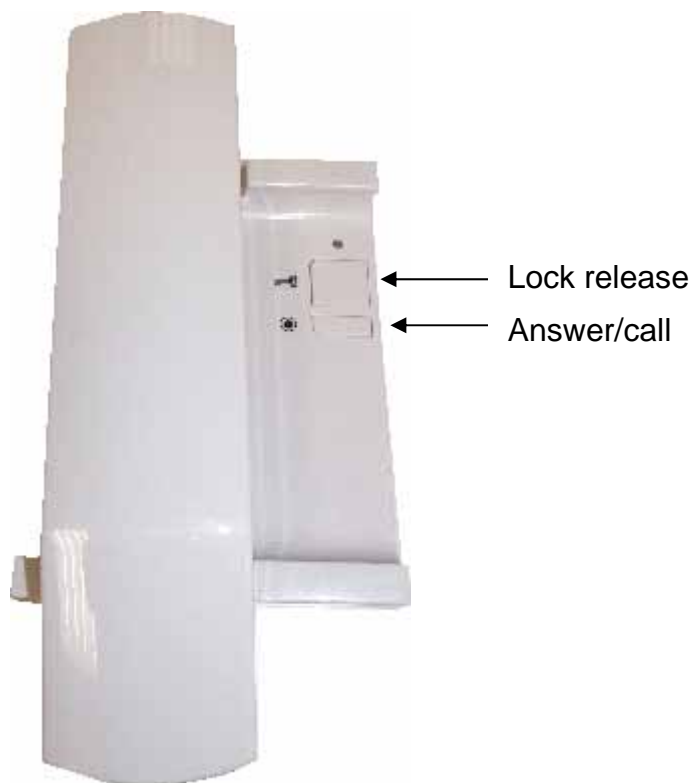

Wiring

1. The audio handset is supplied with pre-wired looms & sockets, these are connected to the equipment in their correct location. The plugs and sockets are 'keyed' to stop incorrect installation. Please do not force the sockets in to the plugs. The pre wired looms should be extended via a suitable junction box.

Extension cable should be of minimum diameter $\geq 0.5\text{mm}^2$, the maximum distance from an outdoor station to the farthest monitor distance should be $\leq 70\text{m}$.

2. Each Monitor/handset **should be connected parallel**.
Maximum number of video monitors is 4; the maximum number of audio handsets is 2.

The Power supply unit requires a 230vAC 50Hz supply which should be protected by a suitable fuse or MCB.

Connection Details

- | | |
|-----------|-------|
| 1. Red | Audio |
| 2. Blue | GND |
| 3. Yellow | V+ |
| 4. White | Video |

Volume adjust



J1
Ringing
output

Power Input

CN1 input 1

CN2 input 2

J3
outdoor unit light

